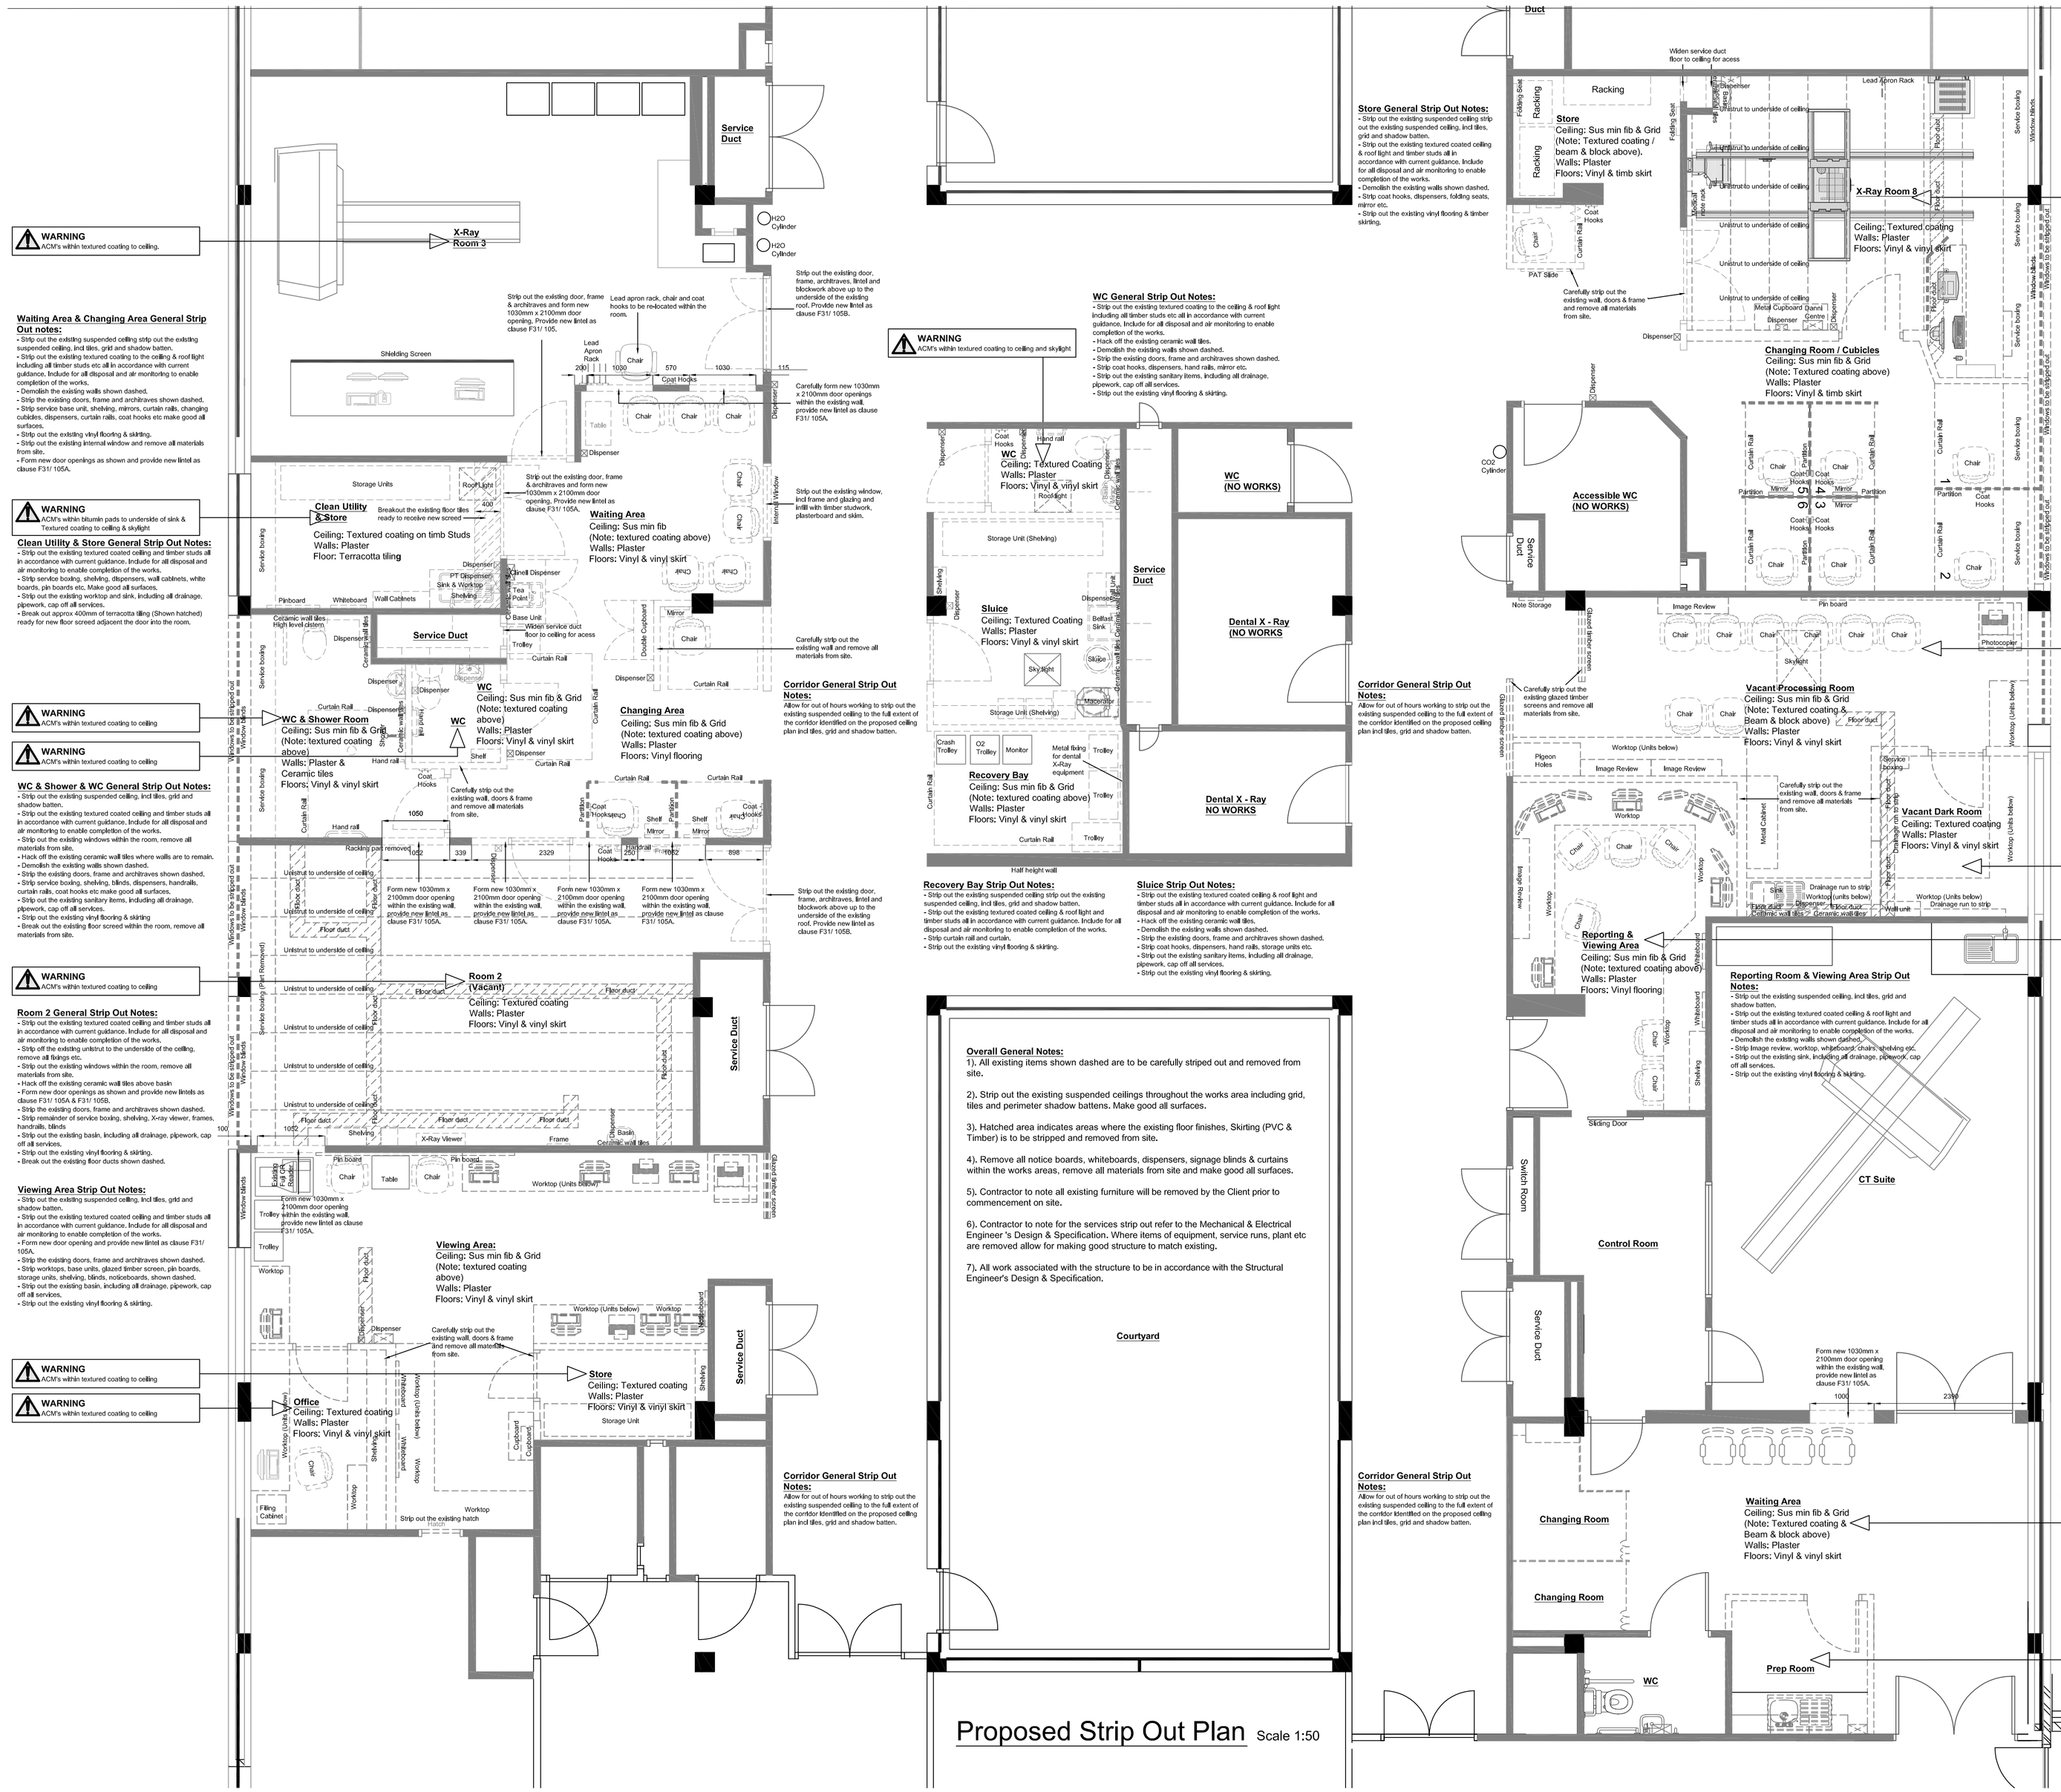

WARNING
ACM's within textured coating to ceiling.

Waiting Area & Changing Area General Strip Out notes:
- Strip out the existing suspended ceiling strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling to the ceiling & roof light including all timber studs etc all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Demolish the existing walls shown dashed.
- Strip the existing doors, frame and architraves shown dashed.
- Strip service base unit, shelving, mirrors, curtain rails, changing cubicles, dispensers, curtain rails, coat hooks etc make good all surfaces.
- Strip out the existing vinyl flooring & skirting.
- Strip out the existing internal window and remove all materials from site.
- Form new door openings as shown and provide new lintel as clause F31/ 105A.

WARNING
ACM's within bitumin pads to underside of sink & Textured coating to ceiling & skylight

Clean Utility & Store General Strip Out Notes:
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip service boxing, shelving, dispensers, wall cabinets, white boards, pin boards etc. Make good all surfaces.
- Strip out the existing worktop and sink, including all drainage, pipework, cap off all services.
- Break out approx 400mm of terracotta tiling (Shown hatched) ready for new floor screed adjacent the door into the room.

WARNING
ACM's within textured coating to ceiling

WARNING
ACM's within textured coating to ceiling

WC & Shower & WC General Strip Out Notes:
- Strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip out the existing windows within the room, remove all materials from site.
- Hack off the existing ceramic wall tiles where walls are to remain.
- Demolish the existing walls shown dashed.
- Strip the existing doors, frame and architraves shown dashed.
- Strip service boxing, shelving, blinds, dispensers, handrails, curtain rails, coat hooks etc make good all surfaces.
- Strip out the existing sanitary items, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting
- Break out the existing floor screed within the room, remove all materials from site.

WARNING
ACM's within textured coating to ceiling

Room 2 General Strip Out Notes:
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip off the existing unistrut to the underside of the ceiling, remove all fixings etc.
- Hack off the existing ceramic wall tiles above basin
- Form new door openings as shown and provide new lintels as clause F31/ 105A & F31/ 105B.
- Strip the existing doors, frame and architraves shown dashed.
- Strip remainder of service boxing, shelving, X-ray viewer, frames, handrails, blinds
- Strip out the existing basin, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting.
- Break out the existing floor ducts shown dashed.

Viewing Area Strip Out Notes:
- Strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Form new door opening and provide new lintel as clause F31/ 105A.
- Strip the existing doors, frame and architraves shown dashed.
- Strip worktops, base units, glazed timber screen, pin boards, storage units, shelving, blinds, noticeboards, shown dashed.
- Strip out the existing basin, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting.

WARNING
ACM's within textured coating to ceiling

WARNING
ACM's within textured coating to ceiling

WC General Strip Out Notes:
- Strip out the existing textured coating to the ceiling & roof light including all timber studs etc all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Hack off the existing ceramic wall tiles.
- Demolish the existing walls shown dashed.
- Strip the existing doors, frame and architraves shown dashed.
- Strip coat hooks, dispensers, hand rails, mirror etc.
- Strip out the existing sanitary items, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting.

Corridor General Strip Out Notes:
Allow for out of hours working to strip out the existing suspended ceiling to the full extent of the corridor identified on the proposed ceiling plan incl tiles, grid and shadow batten.

Recovery Bay Strip Out Notes:
- Strip out the existing suspended ceiling strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling & roof light and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip curtain rail and curtain.
- Strip out the existing vinyl flooring & skirting.

Sluice Strip Out Notes:
- Strip out the existing textured coated ceiling & roof light and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Hack off the existing ceramic wall tiles.
- Demolish the existing walls shown dashed.
- Strip the existing doors, frame and architraves shown dashed.
- Strip coat hooks, dispensers, hand rails, storage units etc.
- Strip out the existing sanitary items, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting.

Corridor General Strip Out Notes:
Allow for out of hours working to strip out the existing suspended ceiling to the full extent of the corridor identified on the proposed ceiling plan incl tiles, grid and shadow batten.

Store General Strip Out Notes:
- Strip out the existing suspended ceiling strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling & roof light and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Demolish the existing walls shown dashed.
- Strip coat hooks, dispensers, folding seats, mirror etc.
- Strip out the existing vinyl flooring & timber skirting.

WARNING
ACM's within textured coating to ceiling and skylight

X-Ray Room 8 General Strip Out Notes:
Note: Philips will be re-locating the existing Xray equipment shown at the end of Phase 1.
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip off the existing unistrut to the underside of the ceiling, remove all fixings etc.
- Strip out the existing windows within the room, remove all materials from site.
- Hack off the existing ceramic wall tiles above basin
- Strip the existing doors, frame and architraves shown dashed.
- Strip remainder of service boxing, shelving, lead apron rack, dispensers, blinds etc.
- Strip out the existing basin, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & skirting.

WARNING
ACM's within textured coating to ceiling

Changing Room / Cubicles General Strip Out Notes:
- Strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coated ceiling and timber studs all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Strip out the existing windows within the room, remove all materials from site.
- Strip the existing doors, frame and architraves shown dashed.
- Strip remainder of service boxing, curtain rails, changing cubicles, coat hooks, mirrors.
- Strip out the existing basin, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & timber skirting.

WARNING
ACM's within textured coating to ceiling and skylight

Vacant Processing Room & Dark Room General Strip Out Notes:
- Strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coating to the ceiling & roof light including all timber studs etc all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Demolish the existing walls shown dashed.
- Strip out the existing window within the room, remove all materials from site.
- Strip the existing doors, frame and architraves shown dashed.
- Strip existing worktops and base units, service boxing, Image review, metal cabinets, sink, dispensers, pigeon holes, glazed timber screens, ceramic wall tiles etc shown dashed, make good all surfaces.
- Strip out the existing basin, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & timber skirting.
- Breakout the existing floor ducts and remove all pipework, drainage etc.

WARNING
ACM's within textured coating to ceiling

WARNING
ACM's within textured coating to ceiling

WARNING
ACM's within textured coating to ceiling

Waiting Area
General Strip Out Notes:
- Strip out the existing suspended ceiling, incl tiles, grid and shadow batten.
- Strip out the existing textured coating to the ceiling, including all timber studs etc all in accordance with current guidance. Include for all disposal and air monitoring to enable completion of the works.
- Demolish the existing walls shown dashed.
- Carefully remove the existing door, frame and architraves shown dashed to the prep room and carefully store for reviking.
- Strip existing worktops and base units, wall units, service boxing, ceramic wall tiles etc shown dashed, make good all surfaces.
- Strip out the existing sink, including all drainage, pipework, cap off all services.
- Strip out the existing vinyl flooring & timber skirting.
- Form new door openings as shown and provide new lintels as per the strip out plan.

WARNING
ACM's within textured coating to ceiling

WARNING
ACM's within textured coating to ceiling